

19.7x120
15x70

Ceramic Surface



RAK
CERAMICS

Challet Wood	06
Delta Concrete	08
Fox Wood	10
Crea Wood	14
Classic Wood	14
Glamour Wood	20
Reserve Wood	18
Way Concrete	20

RAK
CERAMICS



19.7X120

19.7x120

Challet Wood

Challet Wood

RED BODY CERAMIC TILES
Matt • Rectified • Smooth



challet wood light grey



challet wood grey



challet wood ivory



challet wood light beige



challet wood beige



challet wood sandy brown

Name	Code	Size(CM)
challet wood ivory	A22RCHWD#IVO.MoXoR	19.7x120
challet wood light beige	A22RCHWD#LBE.MoXoR	19.7x120
challet wood beige	A22RCHWD#BEE.MoXoR	19.7x120
challet wood sandy brown	A22RCHWD#SAB.MoXoR	19.7x120
challet wood light grey	A22RCHWD#LIG.MoXoR	19.7x120
challet wood grey	A22RCHWD#GRY.MoXoR	19.7x120

Sizes (cm)	Thickness (mm)	Pieces X	M ² X	Kg X	X Sq. Pallet	M ² X Sq. Pallet	kg X Sq. Pallet
19.7x120	10	6	1.42	26.00	72	102.24	1892.00

SIZES



19.7x120 cm
7.75"x47.24"



Wall and Floor: Challet Wood Beige 19.7x120 cm


19.7X120

Delta Concrete

RED BODY CERAMIC TILES
Matt • Rectified • Light Structure



delta concrete white

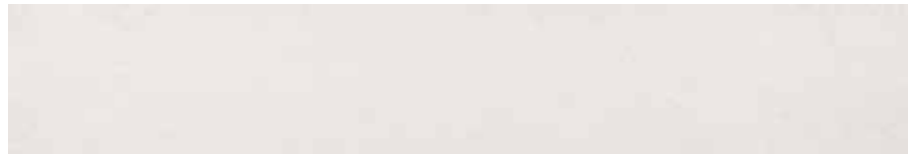

delta concrete ivory




delta concrete grey



delta concrete brown



delta concrete white decor

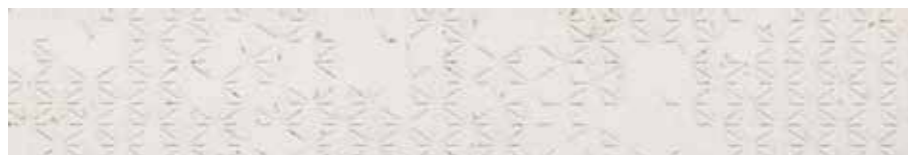

delta concrete ivory decor




delta concrete grey decor




delta concrete brown decor

SIZES



19.7x120 cm
7.75"x47.24"

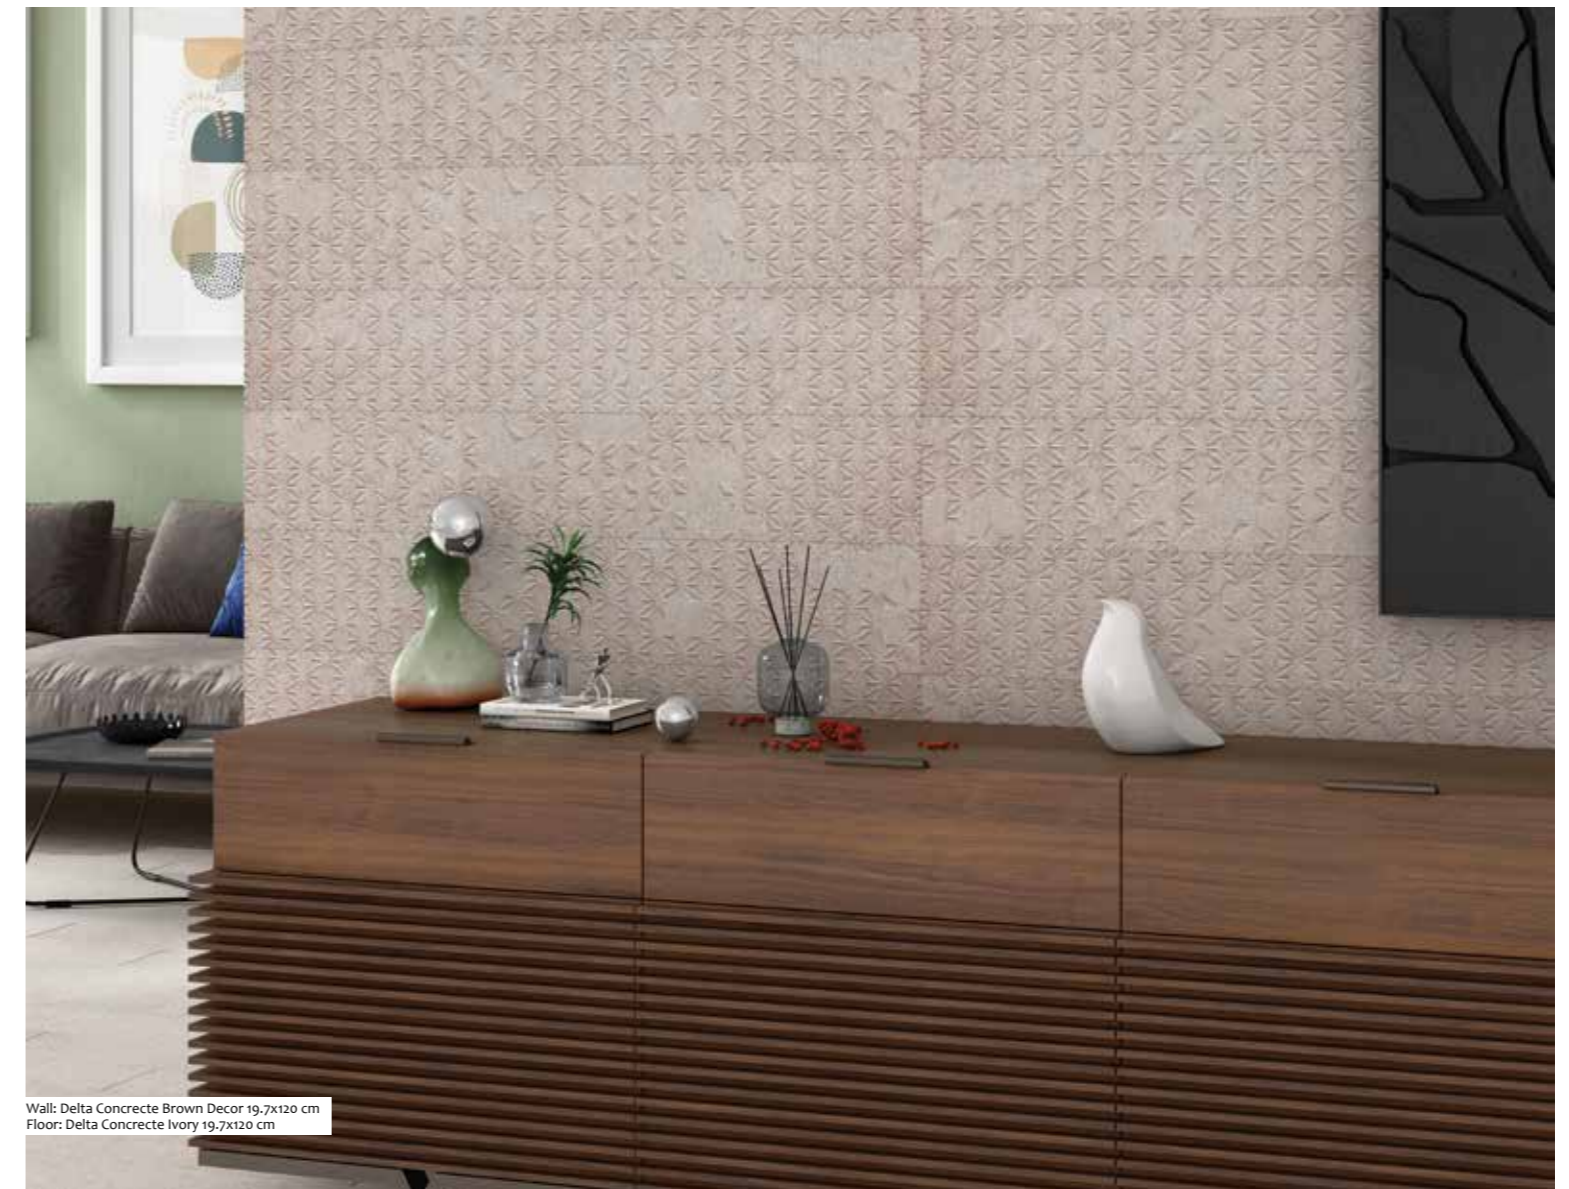

Wall: Delta Concrete Brown Decor 19.7x120 cm
Floor: Delta Concrete Ivory 19.7x120 cm

Name	Code	Size(CM)	Name	Code	Size(CM)
delta concrete white	A22RDTAC#WHE.MoXoR	19.7x120	delta concrete white decor	A22RDTAC#WHE.MDXoR	19.7x120
delta concrete grey	A22RDTAC#GRY.MoXoR	19.7x120	delta concrete grey decor	A22RDTAC#GRY.MDXoR	19.7x120
delta concrete ivory	A22RDTAC#IVO.MoXoR	19.7x120	delta concrete ivory decor	A22RDTAC#IVO.MDXoR	19.7x120
delta concrete brown	A22RDTAC#BRN.MoXoR	19.7x120	delta concrete brown decor	A22RDTAC#BRN.MDXoR	19.7x120

Sizes (cm)	Thickness (mm)	Pieces X	M² X	Kg X	X Sq. Pallet	M² X Sq. Pallet	kg X Sq. Pallet
19.7x120	10	6	1.42	26.00	72	102.24	1892.00

19.7x120

Fox Wood

RED BODY CERAMIC TILES
Matt • Rectified • Smooth



fox wood white



fox wood light grey



fox wood grey



fox wood dark grey



fox wood ivory



fox wood light beige





fox wood beige



fox wood brown

Fox Wood

SIZES



19.7x120 cm
7.75"x47.24"



Floor: Fox Wood Brown 19.7x120 cm

Name	Code	Size(CM)	Name	Code	Size(CM)
fox wood white	A22RFOXW#WHE.MoXoR	19.7x120	fox wood ivory	A22RFOXW#IVO.MoXoR	19.7x120
fox wood light grey	A22RFOXW#LIG.MoXoR	19.7x120	fox wood light beige	A22RFOXW#LBE.MoXoR	19.7x120
fox wood grey	A22RFOXW#GRY.MoXoR	19.7x120	fox wood beige	A22RFOXW#BEE.MoXoR	19.7x120
fox wood dark grey	A22RFOXW#DKG.MoXoR	19.7x120	fox wood brown	A22RFOXW#BRN.MoXoR	19.7x120

Sizes (cm)	Thickness (mm)	Pieces X	M ² X	Kg X	X Sq. Pallet	M ² X Sq. Pallet	kg X Sq. Pallet
19.7x120	10	6	1.42	26.00	72	102.24	1892.00



15x90
15x70

15X90

Crea Wood

Crea Wood

RED BODY CERAMIC TILES
Matt • Rectified • Smooth



crea wood beige



Floor: Crea Wood Beige 15x90 cm

SIZES



15x90 cm
5.90"x35.43"

Name	Code	Size(CM)
crea wood beige	A59RCRWD-BEE.MoXoR	15x90

Sizes (cm)	Thickness (mm)	Pieces X	M ² X	Kg X	X Sq. Pallet	M ² X Sq. Pallet	kg X Sq. Pallet
15x90	10	7	1.89	33.00	48	90.72	1600.00

Classic Wood

RED BODY CERAMIC TILES
Matt • Straight • Smooth




classic wood ivory



classic wood white



classic wood light beige




classic wood light grey



classic wood rosy brown



classic wood dark grey



classic wood dark brown



classic wood anthracite

SIZES



15x70 cm
5.90"x27.56"

Name	Code	Size(CM)	Name	Code	Size(CM)
classic wood anthracite	ARB74CCWDANTZMSNLU	15x70	classic wood light beige	ARB74CCWDLBEZMSNLU	15x70
classic wood brown	ARB74CCWDDBRZMSNLU	15x70	classic wood light grey	ARB74CCWDLIGZMSNLU	15x70
classic wood dark grey	ARB74CCWDDKGZMSNLU	15x70	classic wood rosy brown	ARB74CCWDRBNZMSNLU	15x70
classic wood ivory	ARB74CCWDIVOZMSNLU	15x70	classic wood white	ARB74CCWDWHEZMSNLU	15x70

Sizes (cm)	Thickness (mm)	Pieces X	M ² X	Kg X	X Sq. Pallet	M ² X Sq. Pallet	kg X Sq. Pallet	X Eu. Pallet	M ² X Eu. Pallet	kg X Eu. Pallet
15x70	10	12	1.26	24	72	90.72	1748	60	75.6	1460



Floor: Classic Wood White 15x70 cm, Classic Wood Rosy Brown 15x70 cm

Reserve Wood

RED BODY CERAMIC TILES

Matt • Straight • Smooth



reserve wood white



reserve wood beige



reserve wood light grey



reserve wood rosy brown



reserve wood grey



reserve wood brown



reserve wood dark grey



reserve wood chocolate



reserve wood anthracite



reserve wood dark brown



reserve wood greige

Name	Code	Size(CM)	Name	Code	Size(CM)
reserve wood white	ARB74RSVWWHEZMSNLU	15x70	reserve wood beige	ARB74RSVWBEEZMSNLU	15x70
reserve wood light grey	ARB74RSVWLGZMSNLU	15x70	reserve wood rosy brown	ARB74RSVWRBNZMSNLU	15x70
reserve wood grey	ARB74RSVWGRYZMSNLU	15x70	reserve wood brown	ARB74RSVWBRNZMSNLU	15x70
reserve wood dark grey	ARB74RSVWDKGZMSNLU	15x70	reserve wood chocolate	ARB74RSVWCHOZMSNLU	15x70
reserve wood anthracite	ARB74RSVWANTZMSNLU	15x70	reserve wood dark brown	ARB74RSVWDBRZMSNLU	15x70
reserve wood greige	ARB74RSVWGEZMSNLU	15x70			

Sizes (cm)	Thickness (mm)	Pieces X	M ² X	Kg X	X Sq. Pallet	M ² X Sq. Pallet	kg X Sq. Pallet	X Eu. Pallet	M ² X Eu. Pallet	kg X Eu. Pallet
15x70	10	12	1.26	24	72	90.72	1748	60	75.6	1460

SIZES




15x70 cm
5.90"x27.56"



Floor: Reserve Wood White 15x70 cm, Reserve Wood Light Grey 15x70 cm, Reserve Wood Grey 15x70 cm, Reserve Wood Dark Grey 15x70 cm, Reserve Wood Anthracite 15x70 cm

Way Concrete

RED BODY CERAMIC TILES
Matt • Straight • Smooth



way concrete light grey



way concrete beige



way concrete anthracite



way concrete brown

Glamour Wood

RED BODY CERAMIC TILES
Matt • Straight • Smooth



glamour wood beige


SIZES



15x70 cm
5.90"x27.56"

Name	Code	Size(CM)	Name	Code	Size(CM)
glamour wood beige	ARB74GMRWBEEZMSNLU	15x70	way concrete brown	ARB74WCCEBRNZMSNLU	15x70
way concrete light grey	ARB74WCCELIGZMSNLU	15x70	way concrete beige	ARB74WCCEBEEZMSNLU	15x70
way concrete anthracite	ARB74WCCEANTZMSNLU	15x70			

Sizes (cm)	Thickness (mm)	Pieces X	M² X	Kg X	X Sq. Pallet	M² X Sq. Pallet	kg X Sq. Pallet	X Eu. Pallet	M² X Eu. Pallet	kg X Eu. Pallet
15x70	10	12	1.26	24	72	90.72	1748	60	75.6	1460

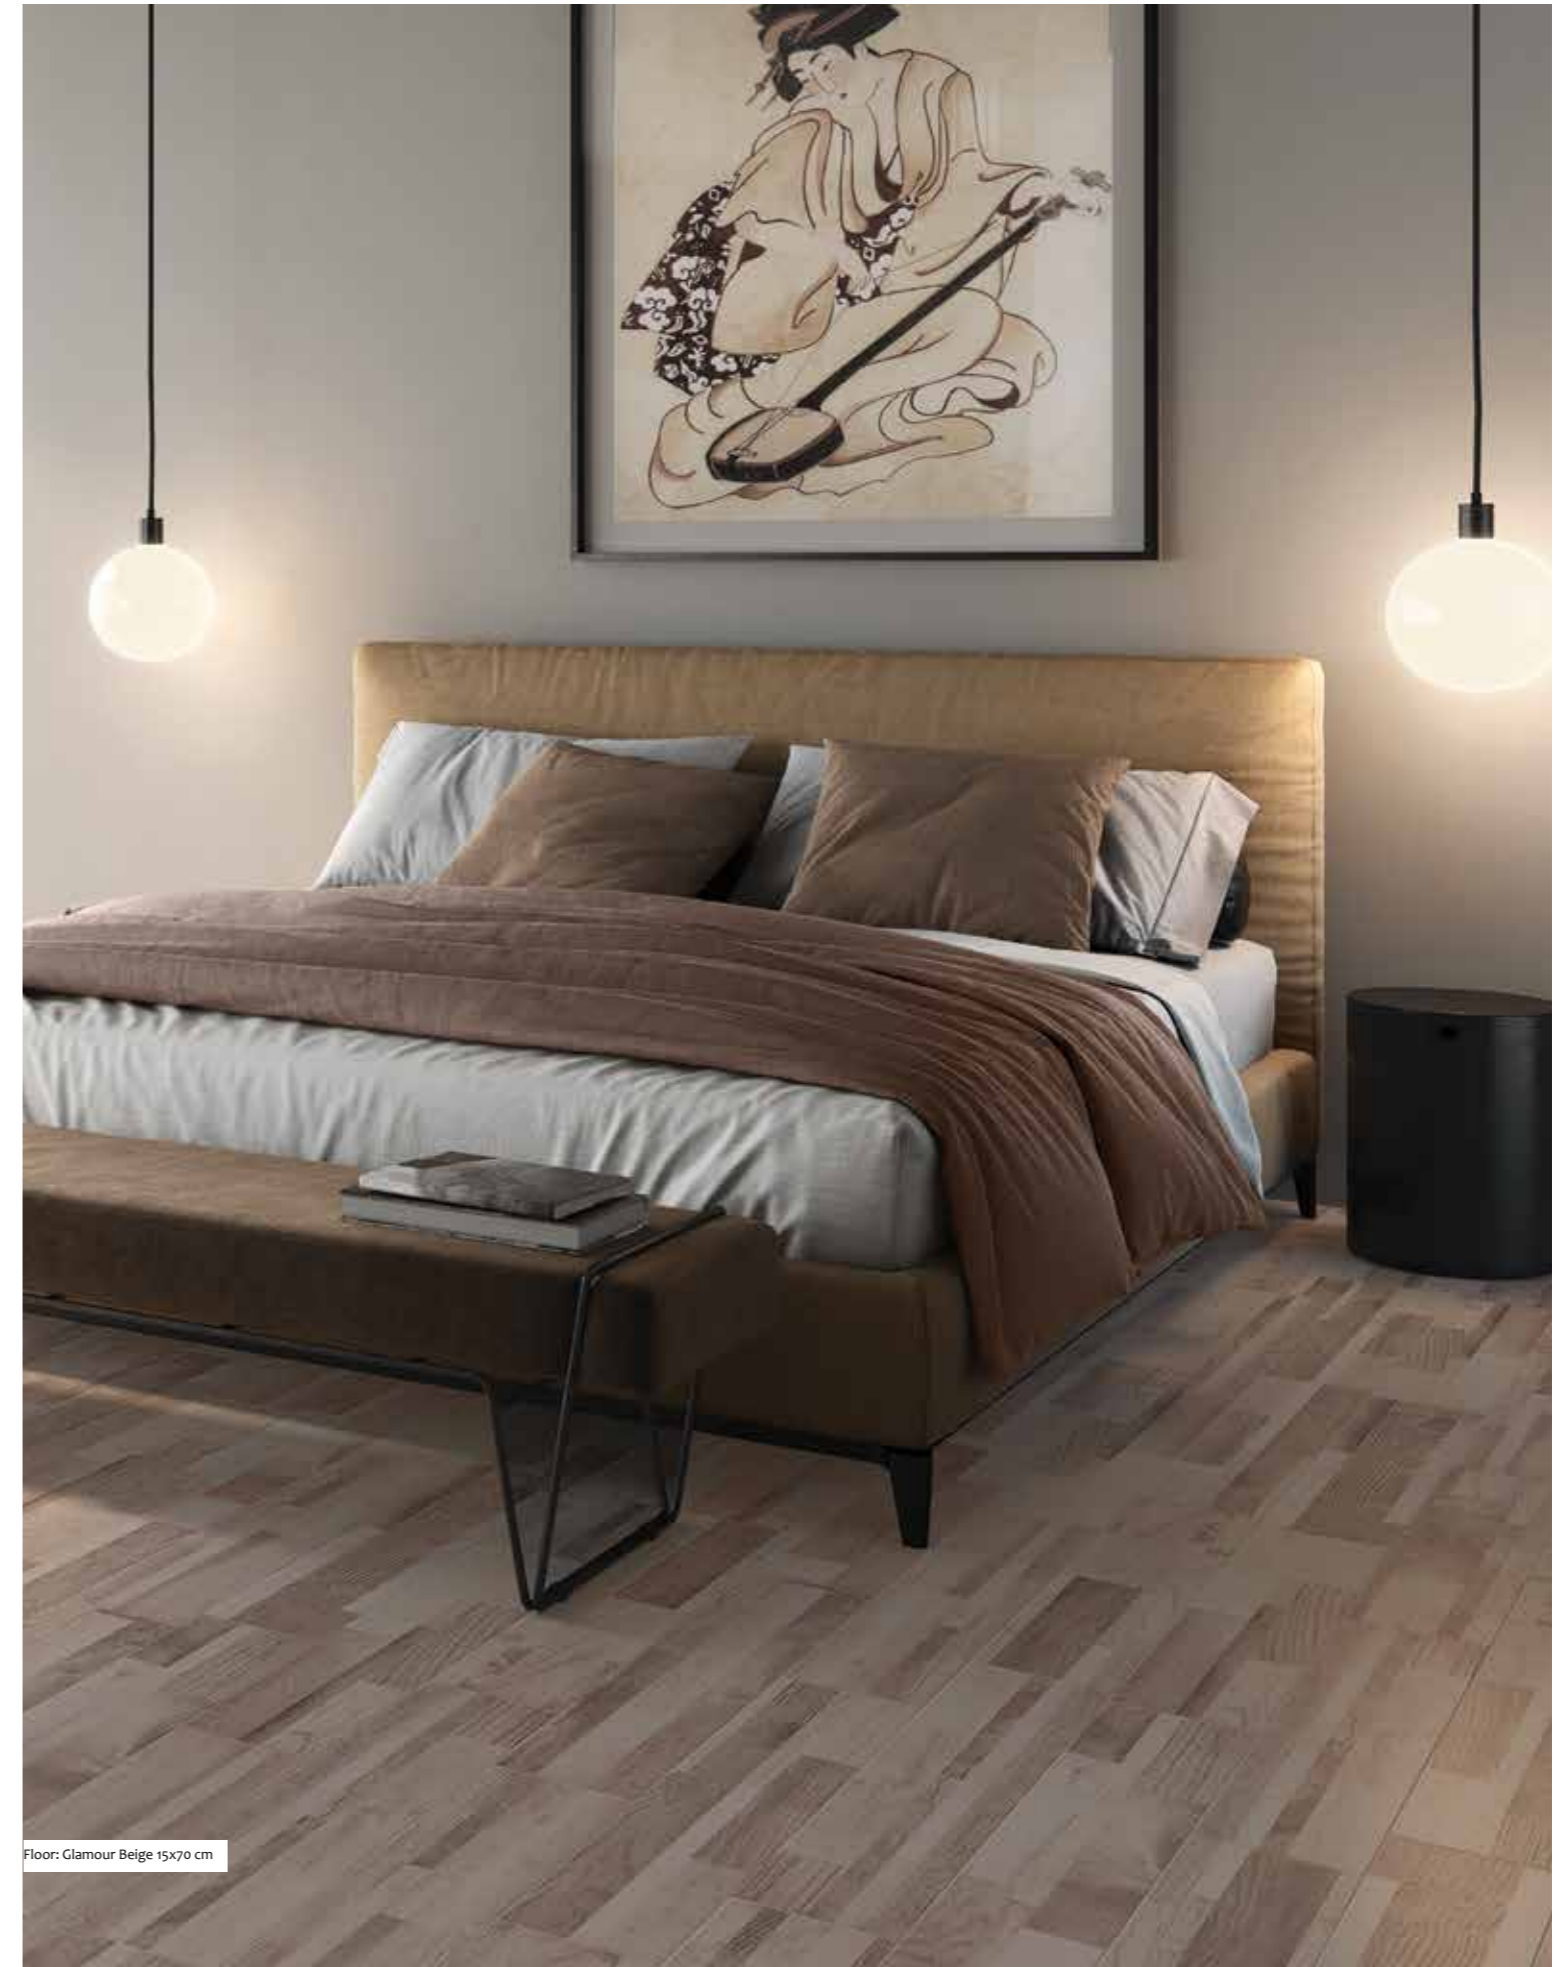

Floor: Glamour Beige 15x70 cm

TECHNICAL FEATURES

RED BODY AND WHITE BODY CERAMIC TILES (BIII):

Red body and white body Ceramic tiles are made with finest quality clays and with chamotte (a ceramic raw material with high percentage of silica). These raw materials are submitted to dry grinding and suitably mixed and wet and then pressed with hydraulic presses. Quick-cycle support firing is obtained via roller kilns reaching temperatures of approximately 1130 °C. After biscuit glazing, the vitrified product is sintered in a single-layer roller kiln at approximately 1030 °C. The resulting wall tiles have an average bending strength that is higher than 16 N/mm² in accordance with the UNI EN ISO10545-4 standard and a water absorption level that is higher than 10 %; they belong to the BIII (GL) group according to the International Standard ISO 13006 and UNI EN 14411 standard. This class of products shows virtually no shrinkage during firing; therefore such dimensional consistency results in extremely easy laying.

ADVICE ON LAYING

Ceramic Red and White body tiles can be laid using either tile adhesives or cement mortar. Under no circumstances should the tiles be wet before laying when using acrylic or vinyl resin based adhesives or two- component organic solvent based adhesives. When laying large sized tiles it is best to adopt the two layer spreading method and, when the laying surface is very large, to provide for suitable expansion joints which must not be spaced more than 4-5 linear meters apart from one another.















IMPORTANT POINTS TO REMEMBER WHILE LAYING THESE TILES

When laying on wet concrete or plaster, leave to dry for at least one week for each centimetre of thickness.

When laying on brick, never lay on tile adhesive measuring more than 4-5 mm in thickness. For laying on flexible supports (for example plasterboard panels, polymer panels, etc.) which may result in movement of the tiles, we advise laying on tile adhesive measuring no more than 2-3 mm in thickness and to use class C2 or D1 glues. For laying on waterproof brick, which prevents the release of damp, we advise laying on tile adhesive measuring no more than 3 mm in thickness and to use class C2 or D1 glues.

Avoid laying without expansion joints or joints where stress due to expansion is released directly onto the tile.

TECHNICAL CHARACTERISTICS - RED BODY AND WHITE BODY CERAMIC TILES (BIII)

	Test Description	Standard Test Method	International Standard ISO 13006	RAK Ceramics Specifications
	Length & Width	BS EN ISO 10545-2	+/- 0.5%	+/- 0.3%
	Thickness	BS EN ISO 10545-2	+/-10%	+/- 5.0%
	Rectangle Squareness	BS EN ISO 10545-2	+/- 0.5%	+/- 0.4%
	Straightness of sides	BS EN ISO 10545-2	+/- 0.5%	+/- 0.3%
	Surface Flatness	BS EN ISO 10545-2	+/- 0.5%	+/- 0.3%
	Water Absorption	BS EN ISO 10545-3	10% < E <= 20%	10% <E <= 18%
	Modulus of Rupture	BS EN ISO 10545-4		
	Thickness > = 7.5mm		>=12 N/mm ²	>=16 N/mm ²
	Thickness < = 7.5mm		>=15 N/mm ²	>=16 N/mm ²
	Breaking Strength	BS EN ISO 10545-4		
	Thickness > = 7.5mm		>=600N	>=650N
	Thickness < = 7.5mm		>=200N	>=400N
	Resistance to surface abrasion	BS EN ISO 10545-7	Manufacturer to state Abrasion Class	Class 2 - 4
	Resistance to Thermal Shock	BS EN ISO 10545-9	No visible defect	No visible defect
	Crazing Resistance	BS EN ISO 10545-11	No crazing	No crazing
	Resistance to chemicals	BS EN ISO 10545-13	No visible effect	No visible effect
	Resistance to stains	BS EN ISO 10545-14	Manufacturer to state class	Stain removed Min. class 4
	Scratch Hardness : (Moh's)	EN 101	-	4 - 6

Note: Shade variation across the batches is inherent to the manufacturing process and the pre-laying colour comparison is recommended

MAINTENANCE AND CLEANING OF TILES

Maintenance of ceramic and porcelain tiles on dry surfaces is relatively easy. RAK Ceramics tiles are highly scratch and stain resistant.

- By regularly sweeping the floor, you can help avoid scratches that small pebbles or sand can create.
- Make it a habit to always wipe the soles of your shoes on a mat before entering the house. Thoroughly wipe up any spills using plain warm water.
- While they are not likely to stain your ceramic tiles, spills may stain the grout between the tiles and if they are left to sit for too long, may also stain the actual tiles.
- Plain water is the ideal cleaner because it leaves no residue if you dry the surface of the tiles thoroughly after cleaning.
- If tiles are left wet after cleaning, there may be some unsightly mineral residue after the water dries, but this can easily be removed by spot cleaning.
- If stains resist cleaning with water alone, you can use a mild acidic solution, such as white vinegar. Use it highly diluted and rinse with plain water then dry.
- As food stains are acidic in nature, try using a mild alkaline solution.
- Use common detergents sparingly, rinse with plain water and dry thoroughly.

RAK CERAMICS CARE EXCLUSIVE POST INSTALLATION CLEANING SERVICE

We have collaborated with Fila, a leading company in cleaning, protection and maintenance of ceramic surfaces to offer an exclusive cleaning service to address our customers post installation concerns.

Cleaning after laying is of vital importance as a lot of unseen debris and reactive chemicals can affect the visual appearance of the ceramic material. With this new service, our customers can take advantage of Fila's professional on-site consultation. For more info please visit www.rakceramics.com



TILE-LAYING RECOMMENDATIONS

All RAK Ceramics products are subject to size and shade variations. Please check the size, batch number, caliber, tone, choice, color, quality of the pieces before the installation, as no claims will be accepted once the tiles are installed.

Place some tiles on the floor - 2 or 3 sqm - and check the overall technical and aesthetic characteristics with care and check if there is enough product to finish the work.

Manufacturer's responsibility is only limited to replacement of defective material if any, prior to fixing of tiles and we will not entertain claim of any nature after the tiles are installed.

Therefore, if any issue is found on the delivered product, the contractor for installation or the client should not install the tiles. The issue should be communicated to RAK Ceramics for investigation and further action for resolution as required.

The substrate must be a compact cement bed. Levelling system ensures flatness between tiles avoiding movements during the mortar setting. This reduces the time for the ceramic laying obtaining a perfect lippage-free finish. Avoid movements between the tiles due to the mortar setting.

The width of grout joints must be established by the installation supervisor, unless grout widths are regulated by national laying standards. The grout colour should be selected according to the colour of the tile. We recommend to select a matching colour. Before using fine-grain coloured grout on lapped, polished or brushed products, always test it. If the pigment is very adhesive, it may be very difficult to remove.

We recommend to lay the tiles by using suitable adhesives for each kind of product and surface. As general rule, tiles must be installed in the same position. The minimum joint is 2 mm for rectified tiles, although we suggest a higher joint for big size products. After grouting, remove any excess product as quickly as possible by repeatedly washing the area with a sponge and water.

Steps to follow 1. First, set the tool to the scale according to the ceramic thickness. 2. Introduce the crossheads and continue laying the adjacent tiles. 3. Put the wedges in the crosshead manually. 4. Tighten the wedges with the pliers to level the pieces. 5. Allow for setting for the time recommended by the manufacturer of the adhesive cement. 6. Remove the crossheads. Hit the crosshead with a rubber mallet or with your foot in the direction of the joint. Do not hit the wedges.

The company will not accept any claim if this is due to the problems caused by not following these suggestions and instructions.



LATICRETE IS A RECOMMENDED PARTNER OF RAK CERAMICS

ICONS

COLOUR VARIATIONS



V1 EVEN

The least amount of shade variation attainable.



V2 LIGHT

Light to moderate shade variation within each carton.



V3 MEDIUM

Medium to high shade variation within each carton.

INDICATIONS FOR USE



WALL TILES



FLOOR TILES

SUGGESTED APPLICATIONS



DOMESTIC PURPOSE

Residential areas, hotel rooms, bathrooms



LIGHT COMMERCIAL TRAFFIC AREA

Indoor public areas subject to medium pedestrian traffic such as restaurants, bars, offices, shops, hotel public areas, convention rooms.

In printing, colour of the products may differ slightly from actual, pictures are only for reference.

Contact

RAK CERAMICS
P.O. Box 4714, Ras Al Khaimah,
United Arab Emirates (U.A.E.)
Tel.: +971 7 2467000
Fax: +971 7 2445270
Email : info@rakceramics.com

RAKCERAMICS.COM

RAK

CERAMICS

AVAILABLE IN UAE FLAGSHIP SHOWROOMS:

- ABU DHABI (1):** M39, Mussafah, P.O.Box: 44890, Abu Dhabi.
ABU DHABI (2): Salam Street, Opp. ADCB Head Quarters, P.O.Box: 44890, Abu Dhabi.
ABU DHABI (3): Airport road, Plot No. P5, Sector No. W4, Post Office Tower, P.O.Box: 44890, Abu Dhabi.
AL AIN: Al Sanaiya Road, P.O.Box: 18098, Al Ain.
DUBAI (1): Salahuddin Street, Deira, P.O.Box: 56023, Dubai.
DUBAI (2): Sheikh Zayed Road, Umm Al Sheif, P.O.Box: 56023, Dubai.
SHARJAH: King Faisal Street, Industrial Area 4, P.O.Box: 28427, Sharjah.
AJMAN: Sheikh Khalifa Bin Zayed St, P.O.Box: 15743, Ajman.
RAS AL KHAIMAH: Al Jazeera Al Hamra, P.O.Box: 4714, Ras Al Khaimah.0
FUJAIRAH: Muhammed Bin Matar Street, Opposite Grand Sheikh Zayed Mosque, P.O Box 9058, Fujairah.

